


## NS\_650

### Product Specifications

Description	NS
Design Pressure	20kg/m <sup>3</sup> (10kg/m <sup>3</sup> )
Design Temperature	-196°C~+60°C
Kind of Fluid	Gas, Air, Steam
Hydrostatic Test Pressure	30kg/m <sup>3</sup> (15kg/m <sup>3</sup> )
Pneumatic Test Pressure	22kg/m <sup>3</sup> (11kg/m <sup>3</sup> )

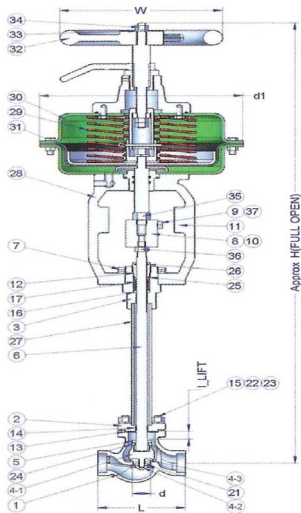

### Service characteristics

No	Name	Material	No	Name	Material	No	Name	Material
1	Body	CF8	13	Indicator Plate	SUP10	25	O-Ring	SUS 304
2	Bonnet Flange	CF8	14	Gland	SUS 304	26	Extended Pipe	VITON
3	Extended Bonnet	SUS 304	15	Gasket	C3604B	27	Yoke	SUS 304
4	Disc	SUS 304	16	Packing	PTFE	28	Spring	SUS 304
5	Cover	SUS 304	17	Stud Bolt	PTFE	29	Diaphragm Casing	SUS 304
6	Seat	AC4C	18	Packing Adapter	SUS 304	30	Diaphragm	AL
7	Disc Stem Nut	SUS 304	19	Packing	V#7020	31	Hand Wheel	NBR
8	Stem	SUS 304	20	Set Screw	PTFE	32	Spring Washer	Pb
9	Adapter	SUS 304	21	Spring Washer	PCTFE	33	Hex Nut	SUS 304
10	Connector	SUS 304	22	Hex Nut	ALDC8	34	Hex Nut	SUS 304
11	Indicator	A2024	23	Set Screw	AL	35	Hex Nut	NBR
12	Guide	AC4C	24	O-Ring	SUS 304TP	36	Hex Nut	SUS 304

### NS550 Ordering information

Model No.	SIZE	d	d1	L	LIQUDE	GAS	W	
NS650-15	15A	15	275	90(s.w)	15	785	573	160
NS650-20	20A	20	275	100(s.w)	15	820	580	160
NS650-25	25A	25	275	120(s.w)	15	820	582	160
NS650-40	40A	40	275	150(s.w)	20	840	600	160
NS650-50	50A	50	355	180(s.w)	25	985	690	200
NS650-65	65A	65	355	216(s.w)	30	985	710	200
NS650-80	80A	80	355	241(s.w)	35	1055	732	200
NS650-100	100A	100	465	292(s.w)	45	1315	870	200
NS650-125	125A	125	465	385(F/L)	55	1430	940	200
NS650-150	150A	150	465	385(F/L)	40	1430	1000	200
NS650-200	200A	200	520	395(F/L)	90	1550	1100	280

